DEPARTMENT OF PUBLIC WORKS

815-724-4200 Direct 815-723-7770 Fax Email: <u>dortiz@joliet.gov</u>



CITY OF JOLIET

August 28, 2020

ADDENDUM NO. 1


TO: Prospective Bidders for the 2020 Sidewalk/ Curb Replacement Project – Contract No. 2526-0920

THE ATTENTION OF ALL PROSPECTIVE BIDDERS ON THE ABOVE REFERENCED PROJECT IS CALLED TO THE FOLLOWING LISTED MODIFICATION IN THE CONTRACT DOCUMENTS:

- 1. Attached is drawing for proposed curb and median replacement at Theodore St. and Caton Farm Rd. at the railroad tracks.
- 2. Two freight trains operate on the tracks per day at Theodore St. and Caton Farm Rd. crossings. The train timetable speed is 25 mph. No passenger trains use these tracks.
- 3. Service walk is to be removed and concrete step installed at 1122 Wilcox.
- 4. Attached is specification and detail for PCC Steps. PCC Steps item has been added to the Schedule of Prices.
- 5. Attached are the revised Schedule of Prices. Please remove the existing schedule of prices and insert the revised Schedule of Prices.

The Acknowledgement of the Receipt of all Addendums must be printed clearly on the outside of your Bid Package or your Bid may not be opened.

David D. Ortiz Civil Engineer I

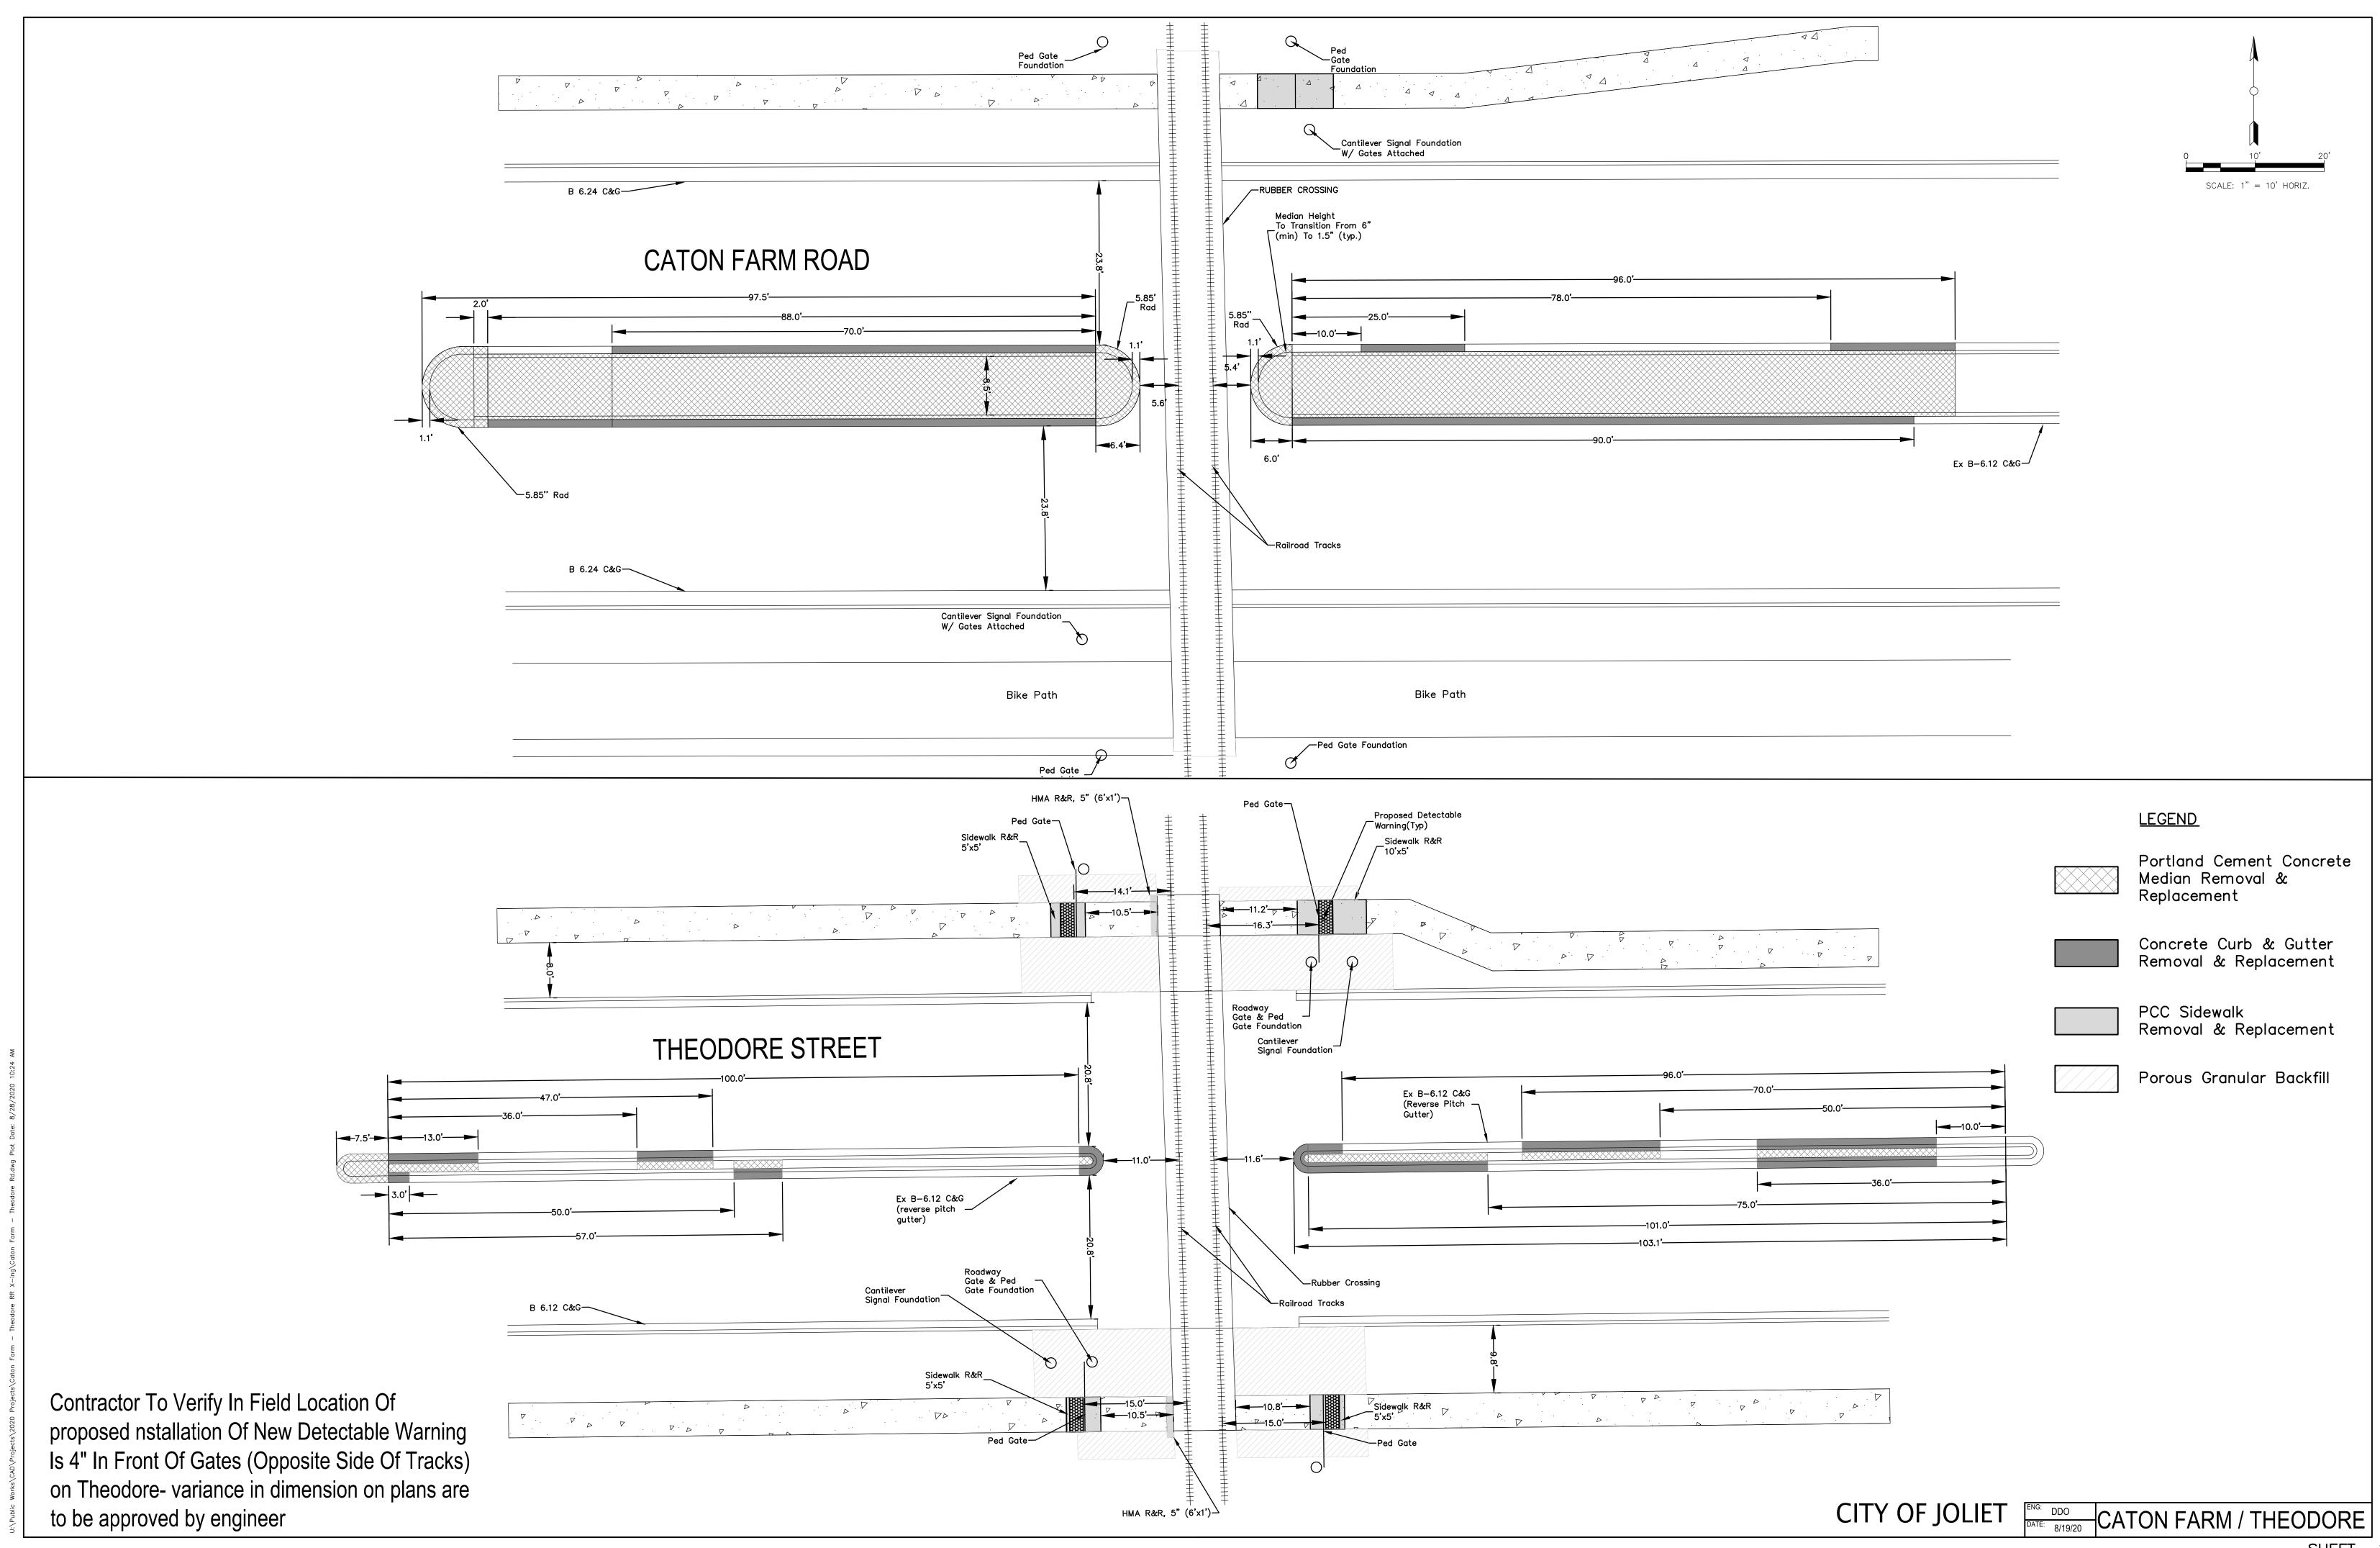

XX. PCC STEPS


This work includes furnishing all material, equipment, and labor necessary to remove the existing material (including but not limited to aggregate, limestone, concrete, asphalt, and/or earth) and installing PCC steps per the "PPC Stair Type A" detail. This work shall be performed according to article 202, 311, 424 and 440 of the "Standard Specifications". The Steps shall be set on compacted 3" subbase granular material, Ty C. The riser height shall be maximum 7". The tread run length shall be minimum 11".

Method of Measurement

This work will be measured per square foot of surface area, both horizontal and vertical, on step risers and treads, and up to two feet leading to and away from the steps.

Method of Payment

This work shall be paid for at the contract unit price, per square foot, for PCC Steps. No other compensation will be made for this work.

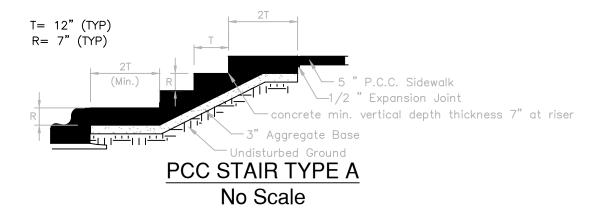

CITY OF JOLIET SCHEDULE OF PRICES

| ITEM N | ITEM DESCRIPTION | QUANTITY | UNITS | UNIT PRICE | COST |
|--------|--|----------|-------|------------|------|
| | | 6800 | - | | |
| NO. 1 | P.C.C. SIDEWALK, 5" | 0000 | SQ FT | | |
| NO. 2 | CONCRETE CURB & GUTTER | 615 | LN FT | | |
| NO. 3 | P.C.C. DRIVEWAY PAVEMENT, 6" | 15 | SQ YD | | |
| NO. 4 | BUFFALO BOX/ VALVE BOX ADJUSTMENT | 1 | EACH | | |
| NO. 5 | HOT MIX ASPHALT REMOVAL & REPLACEMENT,3" | 40 | SQ YD | | |
| NO. 6 | DELINEATOR POST TO BE INSTALLED | 5 | EACH | | |
| NO. 7 | CURB REFLECTORS | 16 | EACH | | |
| NO. 8 | POROUS GRANULAR BACKFILL | 111 | SQ YD | | |
| NO. 9 | PROTECTIVE COAT | 1050 | SQ YD | | |
| NO. 10 | DETECTABLE WARNINGS | 58 | SQ FT | | |
| NO. 11 | CONCRETE REMOVAL ONLY/ RESTORATION WITH 5" TOPSOIL & SEED W/EROSION CONTROL BLANKET | 25 | SQ FT | | |
| NO. 12 | REMOVAL AND DISPOSAL OF CONTAMINATED MATERIAL | 5 | CU YD | | |
| NO. 13 | TREE ROOT GRINDING- 8" DIAMETER AND GREATER | 12 | EACH | | |
| no. 14 | TREE FRAME & GRATE TO BE REMOVED AND RE- INSTALLED | 3 | EACH | | |
| no. 15 | PCC STEPS | 19 | SQ FT | | |
| no. 16 | BRICK PAVER REMOVAL & REINSTALLATION | 140 | SQ FT | | |
| no. 17 | SEAL AND ADJUST MANHOLE FRAME (NON-PAVED) | 1 | L SUM | | |
| no. 18 | CONCRETE MEDIAN- TYPE SB-6.12 | 305 | SQ FT | | |
| no. 19 | CONCRETE MEDIAN SURFACE- 15" | 103 | SQ FT | | |
| no. 20 | CONCRETE MEDIAN SURFACE- 4" | 1581 | SQ FT | | |
| no. 21 | RAILROAD PROTECTIVE LIABILITY INSURANCE | 1 | L SUM | | |
| | | | | | |

BIDDER'S PROPOSAL FOR IMPROVEMENTS:

| CONTRACTOR NAME: |
|------------------|
| ADDRESS: |
| CITY/STATE/ ZIP: |
| TEL NO.: |
| EMAIL ADDRESS: |